


**BLU-JET**  
*ALL TERRAIN INJECTION*

**AT3015**™

## THE MARKET'S BEST JUST GOT BETTER

### Gain Efficiencies in the Field and In Your Budget

The BLU-JET AT3015 integrates many of the features, such as high flotation tires and bottom fill plumbing, that made its predecessor one of the best selling liquid applicators on the market. It further adds items, such as those detailed below, aimed at making it even easier to use for enhanced operational efficiency.

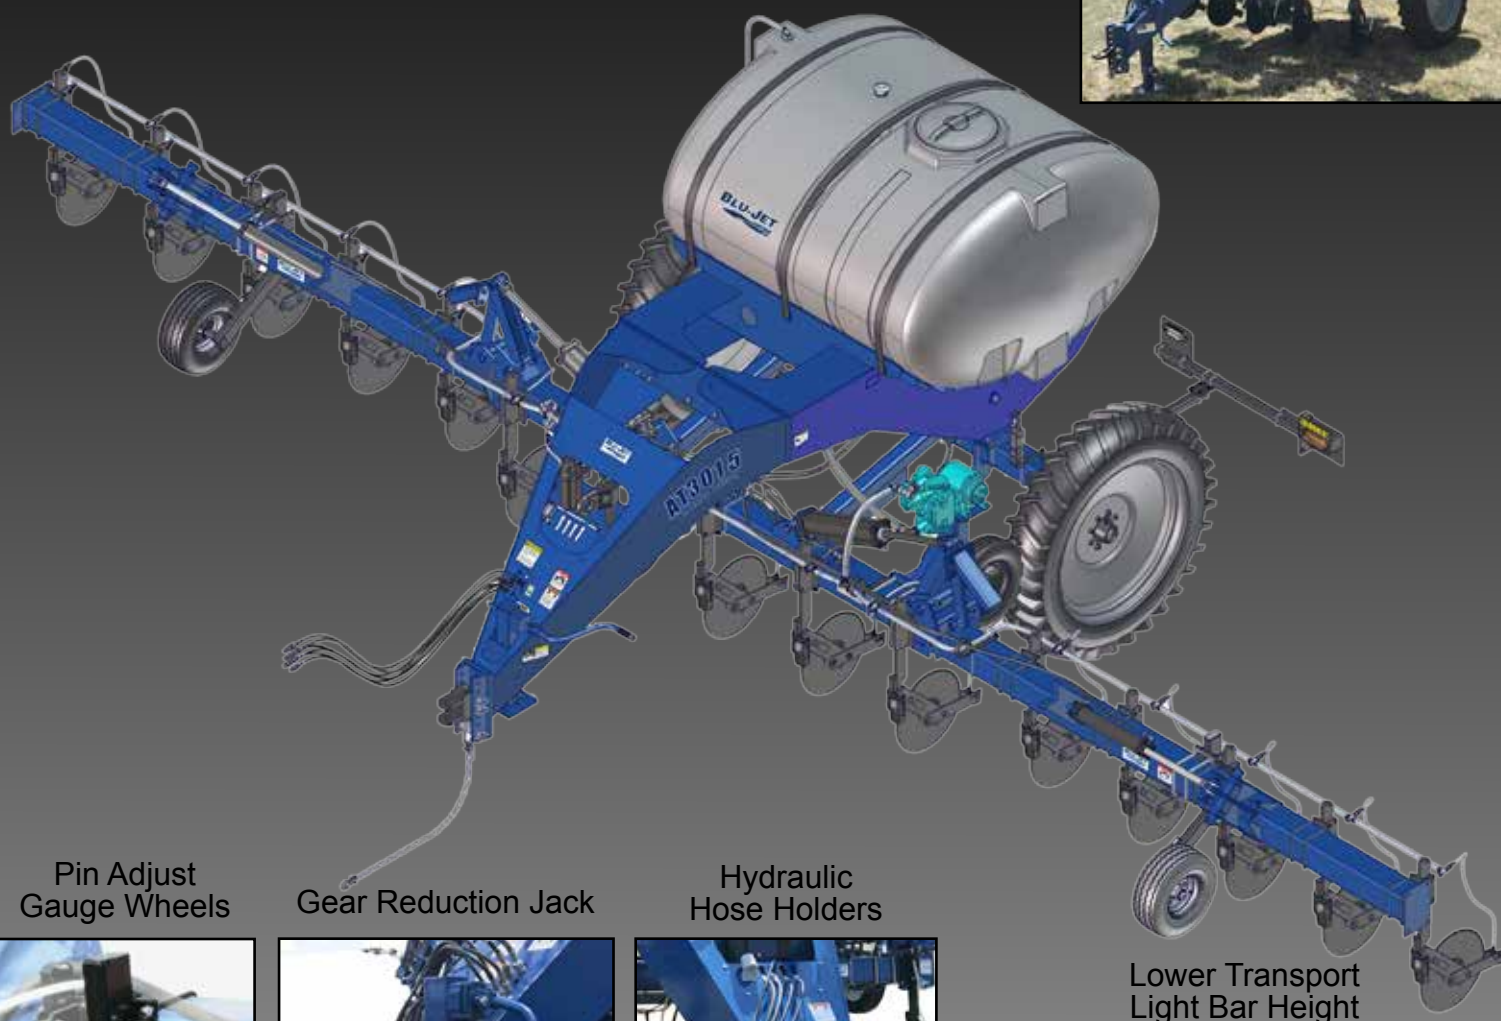

Pin Adjust  
Gauge Wheels

Gear Reduction Jack

Hydraulic  
Hose Holders


Lower Transport  
Light Bar Height



# AT3015™

## Field Proven Durability Meets Cost Efficient Productivity

The AT3015 integrates BLU-JET Commercial Class Application Features into a durable, cost effective, implement for those looking to side dress at 30' and 40' widths. With design elements including an integrated tongue and hitch, a 1,000 gallon elliptical tank mounted perpendicularly to reduce sloshing, high flotation tires, bottom fill plumbing, and BLU-JET Liquid Injection Row Units; the AT3015 continues the tradition of the longest running and best selling liquid applicator on the market today. These standard features, combined with the options of mechanical or variable rate pump drives and gull wing toolbar lift, make the AT3015 an easy choice for those who have years of experience in liquid application, and those who are new to the practice.

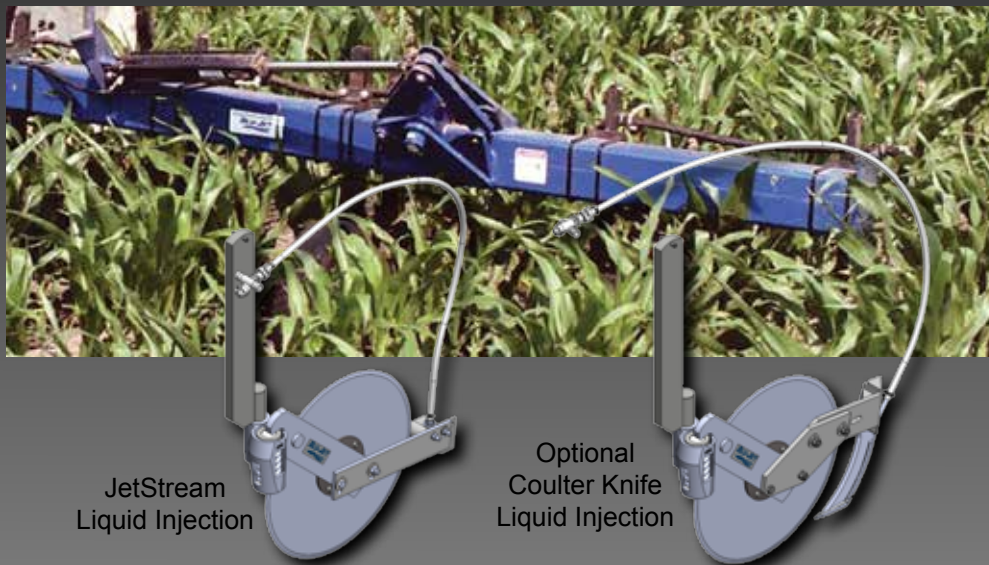


JetStream  
Liquid Injection

Optional  
Coulter Knife  
Liquid Injection

### Specifications:

Row spacings	11R30" (76 cm)	13R30" (76 cm)	11R30"/15R30" (76 cm)
	(9 and 11 row wide spacings also available)		
Main Frame/Hitch	Heavy duty Integrated welded 3/8" (0,95 cm) plate		
Toolbar 7" x 7" tubular	3 section	3 section	5 section
Automatic gull wing	N/A	N/A	Standard
Wing Flex	+ 7 degrees	+7 degrees	± 7 degrees
Wheels and Tires on			
120" Tread (30" Rows)	12.4 x 38, 14 ply	12.4 x 38, 14 ply	12.4 x 38, 14 ply
High axle clearance	31" (79 cm)	31" (79 cm)	31" (79 cm)
Elliptical bottom fill tank	1025 gallon (3880 L) with 2" (5 cm) plumbing		
John Blue piston pump	Single NGP-7055 or Double NGP-9055		
Plumbing	Full length 3/4" (1,9 cm) parallel manifold		
Coulters	Super 1200 coulters with 20" (51 cm) smooth blades		
Overall length	16'8" (5,08 M)	16'8" (5,08 M)	16'8" (5,08 M)
Overall width in transport	13'4" (4,06 M)	15'0" (4,57 M)	16'8" (5,08 M)
Overall height in transport	11'6" (3,51 M)	13'8" (4,17 M)	12'0" (3,66 M)
Empty weight	6190 lbs. (2808 kg)	6695 lbs. (3037 kg)	7819 lbs. (3547 kg)
Hitch weight	1550 lbs. (703 kg)	1625 lbs. (737 kg)	2500 lbs. (1134 kg)
Water Tank/Toolbox, Transport Chain & Jack, Lighting kit, Standard			

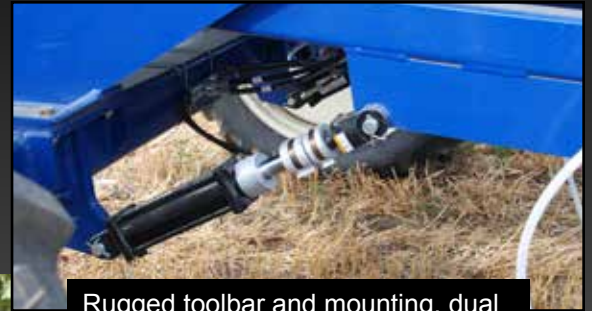

Rugged toolbar and mounting, dual 3 x 8 lift cylinders with depth setting spacers; 3 x 20 wing fold cylinders



Positive contact drive mount with 155/80R12 tires, John Blue pumps, 2" (5 cm) bottom fill with 2" (5 cm) suction line



Bottom Fill Plumbing provides operators with quick & easy access plus safe ground level operation

**Call 800-658-3127 for Details**  
**www.BLU-JET.com**

